ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
Bruhat Bengaluru Mahanagara Palike

DETAILED PROJECT REPORT

CONSULTING SERVICES FOR PREPARATION OF DETAILED PROJECT REPORT FOR

Name of Work: Improvements to Roads and drains of Sahakaranagar Main Road and surrounding areas in ward no. 08 Kodigehalli

COST OF THE PROJECT: 100.00 LAKHS

bmitted To:

e EXECUTIVE ENGINEER,
ad Infrastructure,
ahanka,
MP, Bangalore.

NEWZEN CONSULTANTS BANGALORE
#13, 10th Main Road, 2nd Cross Jnanajyothinagara,
Jnanabharathi, Bangalore – 560 056
Mob: +91 8792620231, Email : newzen576@gmail.com

Scanned by CamScanner

CONTENTS

Chapter – 1 Introduction

Chapter – 2 Investigation & Surveys

Chapter – 3 Design Standard & Specification

Chapter – 4 Design & Proposals

Chapter – 5 Project Cost Estimates

Chapter – 6 Executive Summary

Annexure

Annexure A. 1.1 Key Map

Annexure A.4.1 Flexible Pavement Overlay Design

Annexure A.5.1 Detailed Cost Estimate, Rate Analysis, Draft Tender Schedule

Photos

Typical Cross Sections

Scanned by CamScanner

Chapter -1

INTRODUCTION

Scanned by CamScanner

Chapter -1
INTRODUCTION

1.1 Bengaluru is the capital of India's southern Karnataka state. The center of India's high-tech industry, the city is also known for its parks. It is also known as the Garden City because of its many beautiful gardens and parks. Its Lalbagh Park, Vidhana Soudha is a neo-Dravidian legislative building. Former royal residences include 19th-century Bangalore Palace, modeled after England's Windsor Castle, and Tipu Sultan's Summer Palace, an 18th-century teak structure. During the last couple of decades, city has witnessed drastic increase in population, change in land use pattern of the city, life style of the people and their commuting habits and the revolutionary changes that has taken place in the automobile industry. This has contributed to the growth of vehicular traffic in an enormous way.

1.2 It also called the Silicon Valley of India, because of the high concentration of IT industry. Bangalore is rated to one of the fastest growing cities in Asia with a current population of more than 10 million. During the last couple of decades, city has witnessed drastic increase in population, change in land use pattern of the city, life style of the people and their commuting habits and the revolutionary changes that has taken place in the automobile industry.

1.3 The Bangalore city population is currently more than 11 million and increasing in a forward march. The lifestyle of the citizens is changing day to day due to globalization and introducing of new brands in all sector. Bangalore, the fastest growing city of India, comprises of a dynamic blend of people, belonging to various religions, castes and communities. With the introduction of information technology in the city, it has assumed an international character. IT professionals not only from the various parts of India, but also that of the world, are migrating to the city. This has led to Bangalore becoming more like the melting pot of various cultures. Read on to know more about the people and lifestyle of Bengalooru, India. What adds to the traffic pressure in Bengaluru in particular is that there is very little scope for expansion of roads and the need to use existing roads for smooth movement of vehicles is even more pronounced. It thus becomes mandatory for the administration to ensure better parking facilities. So far, the government and the BBMP have not taken this issue seriously and now the situation is such that it needs to be addressed seriously and effectively. Rapid population growth because of IT and other associated industries in Bengaluru led to an increase in the vehicular population to about 1.5 million, with an annual growth rate of 7-10%. With the increase in population and the expansion of the city, the problem of connectivity of the populace has arisen. Quite obviously personalized modes of transport have grown at a tremendous rate and two wheelers along with the cars

Scanned by CamScanner

1.2 Project Location

The Project includes Improvements to Roads and drains of Sahakaranagar Main Road and surrounding areas in ward no 08 Kodigehalli. The Project area is falls under Yelahanka Division, Byatarayanapura Assembly Constituency in Bangalore City. The Project area is located thickly populated Residential cum Commercial area. The Project Stretch includes Arterial roads and Sub-Arterial roads. For the habitation resided in this area it was very difficult to commute on this stretch in the Rainy season due to non proper flow of water on the Roads and lack of proper drainage facility. By considering these reasons the roads are taken up for Development with Asphalting or White topping depending upon the site scenario.

Key Map of the roads proposed is enclosed in **Annexure A.1.1.**

M/s. NEWZEN CONSULTANTS BANGALORE is entrusted by BBMP to carry out the work of Preparation of Detailed Estimate and Report for the above said work.

Accordingly we **M/s. NEWZEN CONSULTANTS BANGALORE** have commenced the consultancy works as per the scope of services described in the RFP document.

1.3 Scope of Work

The Scope of Services of the Consultancy includes the following:

Scanned by CamScanner

Inventory and condition surveys for existing road & pavement, cross drainage structures and bridges

- Engineering surveys and investigations
- Improvement to the existing pavement and drains, such as horizontal and vertical alignment, curve straightening, rising of the road level in low lying areas above the HFLs, concentric widening / eccentric widening etc.
- Design of Pavement.
- Overlay Design.
- Design of lateral side drains and Cross drainage works such as culverts etc
- Rate analysis of scheduled items, BOQ and Cost estimates.
- Final Detailed Project Report and final drawings
- Photos of the project roads or site

1.4 Contents of the Report

The Methodology, as detailed in the Project proposal, it has been followed for carrying out the necessary Investigations and for the Preparation of Detailed Estimate and Report.

This Report includes the following.

- Chapter 2: Investigation & Surveys
- Chapter 3: Design Standard & Specification
- Chapter 4: Design & Proposals
- Chapter 5: Project Cost Estimates
- Chapter 6: Executive Summary

Scanned by CamScanner

Chapter -2
ENGINEERING SURVEYS AND INVESTIGATIONS

2.1 General

Various surveys and investigations that are the essential inputs for detailed engineering design are detailed in this chapter. All the relevant maps / data / details available with the concerned departments have been collected, compiled and reviewed. Particular attention has been given to past historical data / reports. A review of the past data available in the various studies has been listed out and such available data has been made use of, after updating / augmenting the data wherever necessary. The data as collected has been made use of in analysis, design, formulation of improvement proposals and costing. The activities have been performed on several fronts fully complying with the requirements. The activities that are carried out are brought out hereunder.

The various engineering surveys / investigations of the road sections include:

- Reconnaissance Survey.
- Visual Topographical Survey.
- Road Inventory Survey.
- Pavement Condition Survey.
- Visual Condition Survey.
- Structure Condition Survey
- Soil, geo-technical, material, hydrology and drainage surveys

2.2 Reconnaissance Survey

Reconnaissance Survey of the road, considered for improvements, has been carried out to identify the general condition of roads, drains, culverts and bridges for further surveys / investigations, to understand kind of establishments along the stretches of roads and to work out land acquisition scheme. Making use of the observations / data collected during reconnaissance survey, detailed schedule for surveys / investigations required for the project has been finalized.

2.3 Visual Topographical Survey

Topographic Survey has been conducted all along the corridor by physically measuring the Road Width, Footpath Width, Drain Width, Alignment of Road and with the aid of Google Maps.

2.4 Road Inventory Survey

A detailed inventory and condition survey of road sections has been carried out by making use of well structured inventory data format. It was compiled in tabular form, developed using Excel computer software. Various data collected during the road inventory broadly include.

- Type of terrain.
- Land use.
- Carriageway width.

Scanned by CamScanner

- Type of surfacing
- Shoulder, Median, Drain (tertiary / shoulder), Footpath - type and width
- Road Geometry
- Road Furniture
- Salient Buildings & Structures.
- Road Intersection(s) and their details.
- Land width (RoW)
- Culverts, bridges and other structures (type, size, span arrangement and location).
- General drainage conditions.

2.5 Pavement Condition Survey

The Pavement Condition Survey has been carried out in accordance with IRC Guidelines. All surveys and investigations have been carried out with the following objectives:

- To have an up to date record of road assets.
- To have a clear understanding of road side features including land use, drainage characteristics, etc. and
- To assess the condition and strength data for developing improvement proposals and related designs.

2.5.1 Visual Condition Survey

Visual Condition Survey of the road sections has been carried out by travelling along the patching, rutting, pot holes, edge breaking, etc. by visual observations in a well structured data format. The data so collected has been compiled and presented (kilometer wise) in the form of tables for easy understanding. This data has been used to assess the pavement condition.

2.5.2 Soil, geotechnical, material, hydrology and drainage surveys

i) The activities and Deliverables forming part of the soil, geotechnical, material, hydrology and drainage surveys are described below:

(a) The characteristics of the existing soil of the Project road.

(b) The determination of sub grade CBR (soaked) Project road.

(c) Benkelman Beam Deflection measurements on the Project road for overlay stretches.

(d) Preliminary hydraulic data for bridges, design discharge, HFL, LWL, etc. with a view to checking adequacy of existing waterway.

(e) A broad assessment of the drainage condition and requirement of the Project Highway.

ii) Road signs, safety devices

(a) The provision of Road Signs, Pavement Markings, Safety Barriers, Railings, Delineators, Chevron Markings, Traffic Attenuators. It shall also include Crash Barriers for existing bridges.

Scanned by CamScanner

Chapter -3
DESIGN STANDARD & SPECIFICATION

3.1 General

Planning and design of roads & CD structures, pedestrian facilities and street furniture are essentially based on the IRC standards and MoRT&H specifications. Whenever, the codes / standards are silent on some of the aspects, the same has been planned / designed based on sound engineering practices. Design standards relevant to the project road along with the broad list of design parameters and the relevant IRC codes / specifications have been detailed in Table 3.1.

Table 3.1: Design Standards

Sl. No.	Design Parameters	Reference Code
1.	Geometric Design Standards • Carriageway width • Shoulder • Footpath • Median • Camber • Super Elevation • Horizontal Alignment • Vertical Alignment	As per IRC: 38 - 1988, IRC: 86 - 1983 & IRC: SP : 23 – 1993
2.	Road Furniture • Road Delineators • Road Markings • Road Signs	As per IRC: 79 – 1981 As per IRC: 35 – 1997 As per IRC: 67 – 2001
3.	Road Capacity	As per IRC: 106 – 1990
4.	Pavement Design	As per IRC: 37 – 2012 & IRC: 58 – 2011
5.	Overlay Design	As per IRC: 81 – 1997
6.	Road Drainage	As per IRC: SP: 42 - 1994 & IRC: SP: 50 - 1999
7.	Culverts	As per relevant IRC codes and MoRT&H

The project road section passes through plain terrain. Design standards (as appropriate) have been further elaborated under the following heads:

- ❖ Geometric Design
- ❖ Pavement Design
- ❖ Overlay Design
- ❖ Drainage
- ❖ Road Furniture and Appurtenances
- ❖ Bridges and CD Structures

Scanned by CamScanner

3.2 Design Standards Related to Geometric Design

Design standards related to road geometric along with the suggested design values / standards and recommended values based on site conditions and data analysis are detailed in Table 3.2.

Table 3.2: Geometric Design Standards

Sl. No.	Design Parameters	Design Values
1	Design Speed	Design speed Considered is 40 kmph.
2	Geometric Design Standards	
	• Carriageway Width	Two lane/ Four lane carriageway
	• Camber (Bi-directional)	2.5% for paved carriageway.
	• Super Elevation	Limited to 4%.
	• Footpath	Minimum width - 1.5m
	• Kerb	Barrier / Semi — barrier / Mountable (Barrier type recommended)
	• Extra Widening at Curves	Nil for Radius above 300 m
	• Gradient	Maximum Gradient - 4.0 % (1 in 25) Minimum Gradient for Drainage - 0.5 % (desirable minimum) & 0.3 % (absolute minimum).

3.3 Design Standards Related to Pavement Design

Design standards related to Pavement design are essentially based on the guidelines given in IRC: 37 - 2012 "Tentative Guidelines for the Design of Flexible Pavements ". The suggested design values / standards and recommended values based on site conditions and data analysis are detailed in Table 3.3 and are adapted in the design.

Table 3.3: Overlay Design Standards

SL No.	Design Parameters	Reference Code / Design Values
1.	Pavement design	IRC: 37 - 2012 " Tentative Guidelines for the Design of Flexible Pavements "
	Initial Traffic	In terms of CVPD, vehicles weighing more than 3 ton
	Traffic growth rate	5%
	Design Life	10 to 15 years
	Vehicle damage factor	1.5 to 4.5
2.	Soil Characteristics	CBR Value

3.4 Design Standards Related to Overlay Design

Design standards related to Overlay design are essentially based on the guidelines given in IRC: 81 - 1997 "Guidelines for Strengthening of Flexible Road Pavements Using

Scanned by CamScanner

improvement to Roads and drains of Subakrishnapur Main Road and surrounding areas in ward no: 08 Kudlupalli

Benkelman Beam Deflection Technique". The suggested design values / standards and recommended values based on site conditions and data analysis are detailed in Table 3.4 and are adopted in the design.

Table 3.4: Overlay Design Standards

Sl. No.	Design Parameters	Reference Code / Design Values
1	Overlay Design	IRC: 81 - 1997 "Guidelines for Strengthening of Flexible Road Pavements Using Benkelman Beam Deflection Technique"
	• Design Life	10 years
	• Correction Factors	Temperature Correction Factor Correction for Seasonal Variation (inclusive of correction for moisture content, soil type and rainfall)
	• Minimum Thickness	From structural considerations recommended minimum bituminous overlay thickness is 40 mm AC (minimum) or 50mm BM (as required) + 40mm BC
2	Wearing Course Material (Options)	Bituminous Concrete with Crumb Rubber Modified Bitumen / Plastic Waste.

3.5 Design Standards Related to Road Drainage

Drainage of water from pavement surface is of paramount importance as far as preserving the road assets created by investing huge funds in addition to maintaining the structural soundness and functional efficiency of the road. Design standards related to road drainage are essentially based on the guidelines given in IRC: SP: 42 — 1994 "Guidelines on Road Drainage" and in IRC: SP: 50 - 1999 "Guidelines on Urban Drainage". The suggested design values / standards are detailed in **Table 3.5.**

Table 3.5: Design Standards Related to RoadDrainage

Sl No.	Design Parameters	Design Values
1.	• Camber	1.7 - 2.5 % (bi - directional) for carriageway (camber of 3% is adopted).
	• Longitudinal Gradient	Minimum 0.3 - 0.5% for satisfactory drainage
	• Drain Type	Cast in situ RCC box drain with Precast RCC cover slab. RCC box culverts across cross roads.
	• For Existing Drains	Desilting and Rectification of Damaged Portion

3.6 Design Standards Related to Road Furniture and Appurtenances

Utility and importance of the road are greatly enhanced by installing road furniture and appurtenances at appropriate locations along the project road, which ensures improved road safety. Planning and design of road furniture and appurtenances are as per the guidelines

Scanned by CamScanner

stipulated in IRC. Detailing of each of these components has been done so as to integrate the same with the road improvement scheme. The suggested design values / standards are detailed in Table 3.6.

Table 3.6: Design Standards Related to Road Furnitures and Appurtenances

Sl. No.	Design Parameters	Reference Code / Design Values
1	Road Markings	IRC : 35 - 1997 "Code of Practice for Road Markings".
2	Road Signs	IRC : 67 - 2001 "Code of Practice for Road Signs".
3	Road Delineators	IRC : 79 - 1981 "Recommended Practice for Road Delineators".
4	Pedestrian Facilities	IRC : 103 - 1988 "Guidelines for Pedestrian Facilities".

In addition to the above measures various other integral road components have been planned so as to achieve the maximum and optimal use of the carriageway with no / least interference to traffic flow at the same time ensuring adequate facilities to other road users especially pedestrians. All the encroachments, if any shall be cleared within the RoW.

3.7 Design Standards Related to Bridges and CD Structures

The design standards and loading considered for culverts and bridges are as stipulated in latest IRC codes / Special publications supplemented by appropriate MOST circulars and/or IS codes. The unsafe and/or deficient bridge and culvert structures (existing) will be rehabilitated or replaced by sound structures.

Scanned by CamScanner

Chapter -4
DESIGN & PROPOSALS

4.1 General

Improvement proposals for an existing road section essentially consist of two components, geometric and structural improvements. Geometric improvement deals with visible dimensions of roadway, probable road widening and is dictated by the traffic and economic considerations. Due to the inherent restrictions like limitation in land acquisition, limited right of way and existing utilities / services, etc. the horizontal and vertical alignments in general follow the existing geometry except in situations where improvements are possible. The geometric improvements mainly involve improvements to cross sectional elements such as carriageway, shoulders, etc. The structural component deals with the pavement and embankment design aspects, i.e., the ability of the roads to adequately carry and support the Vehicle / wheel loads over the design period. Safety, speed, efficiency, economy and comfort in traffic movement to a large extent are governed by adequacy of design standards used for a specific road facility.

The improvement proposals need to consider the method of widening like concentric or eccentric to the existing road which is dictated by site situations like available land for acquisition, curvature, existing utilities, terrain, places of worship, monuments, grave yards, places of importance etc.

This chapter deals with the analysis of data collected during various engineering surveys/investigations and the formulation of improvement proposals including planning and design.

4.2 Road Inventory and Physical Characteristics of Road Section

Investigations / studies have been carried out along the Project Stretch. Physical characteristics of these road and road Junctions are as follows.

The Project includes Improvements and Asphalting to Main and cross roads of 407 SFS Yelahanka New Town. The Project area is falls under Yelahanka Division, Yelahanka Assembly Constituency in Bangalore City. The Project area is located thickly populated Residential cum Commercial area. The Project Stretch includes connecting roads and cross roads. For the habitation resided in this area it was very difficult to commute on this stretch in the Rainy season due to non proper flow of water on the Roads and lack of proper drainage facility. By considering these reasons the roads are taken up for Development with Asphalting or White topping depending upon the site

Scanned by CamScanner

[illegible]

[illegible] along this section is generally plain. Width of Carriageway is undivided Carriage Way and Divided Carriage Ways along the Road varies. The Road carries considerable vehicular traffic throughout the day especially during peak hours. Considerable pedestrian traffic is also present along the corridor.

Pavement Design

Pavement design forms an integral part of detailed engineering study. Performance of pavement is critical as the economical returns are directly dependent on its performance. This chapter deals with the design methodology adopted for the construction, strengthening and widening of the existing carriageway and the also suggests the design approach for both flexible and rigid pavement for the new carriageway. This chapter also brings out the present condition of the project corridor, the pavement option study and suggests the best alternate design.

This section describes the studies and investigation carried out on Traffic, existing pavement condition, existing soil sub grade condition and existing embankment. Soil is OGL condition. New pavements are generally flexible, consisting of Granular Sub-base, Water Mix Macadam, Bituminous macadam and wearing course in Bituminous Concrete.

Pavement Design Methodology

Pavement design methodology includes two basic functions namely: design of strengthening and Widening for existing pavement and design of new crust for new. Pavement to be adopted shall be decided based on life cycle cost analysis as a part of pavement design methodology. Accordingly, the following Methodology has been adopted in Pavement design.

Step 1: Various Pavement investigations have been carried out on the project corridor to assess the adequacy of the existing pavement crust. These investigations include:

- Visual Pavement Condition
- Visual shoulder condition
- BBD measurements
- Sub grade investigations
- Investigations on existing soil / granular layers

Step 2: Detailed material investigations have been conducted in the projected influence area and strength characteristics and availability of construction material has been determined.

Step 3: Design thickness of overlay has been estimated from IRC-81-1997 using estimated traffic level and characteristic deflection of particular homogeneous section. Estimated BM thickness is then adjusted to equivalent thickness of BC & DBM using conversion factors

Scanned by CamScanner

given in IRC 81-1997.

Step 4: Homogeneous sections for pavement design have been established and design traffic Loadings for each of them identified. Design of flexible pavement for new road has been carried out in accordance with guidelines of IRC-37-2012.

4.5 Flexible Pavement Design

4.5.1 Design CBR

Existing soil sub grade samples were collected through Trial Pit excavations at Road and shoulder interface. The existing soil sub grade were tested as per IS 2720.

The equivalent CBR is obtained as per IRC 37-2012 Chart for 905 dependability is 10%. Hence the flexible pavement design has been carried out using the IRC code (IRC-37-2012). In this code, pavement designs have been extended to cover up to 150msa and design CBR strengths up to 15%. In order to compute the damage ratio, the allowable repetitions are calculated in terms of the fatigue and rutting. The pavement design was done as per IRC-37-2012 and IIT Pave software. It accepts layer thickness, loading and material characteristics as inputs and has provisions for entering various indigenous data such as rutting and fatigue coefficients, wheel spacing, tyre pressure etc. The analysis is based on the linear elastic, multilayer theory and the stresses and strains developed in various layers of the pavement are obtained.

4.5.2 Design Life for Base and Sub-base Layers

The stage construction for first five years of pavement life is considered as an option. It would be appropriate to design the bottom non bituminous layers (base and sub-base) for axle loads expected in the 15 year design period the upper bituminous layers for axle loads expected at the end of 10 year design period. A 15-years design life has been considered for Base and Sub-base layers of flexible pavement.

4.5.3 Traffic Considerations

The base year traffic, traffic growth and the projected traffic for the design period for each category of vehicles have been arrived from the Traffic Studies. The commercial vehicle considered for the design are based on the vehicular projections considering the actual traffic, the traffic likely to be generated by future developments in the vicinity of the project road. Further, based on the traffic studies the number of commercial vehicles has been adopted.

4.5.4 Traffic Loading

In accordance with the requirement of IRC: 37-2012, the traffic loading for the design period and design lane are to be assessed. Vehicles constituting the commercial vehicles are LCV, 2 Axles, 3 Axles and Multi Axles and Multi Axle Semi Articulated vehicles.

Scanned by CamScanner

4.5.5 Design Approach and Criteria of Flexible pavement

Pavement distress resulting from repeated application of traffic:

- Horizontal tensile strain at the bottom of the bituminous layer
- Vertical compressive strain at the top of the Sub grade

4.5.6 Design Standards Related to Pavement Design

Design standards related to pavement design are essentially based on the guidelines given in IRC: 37-2012 – "Tentative Guidelines for Design of Flexible Pavements".

Table 4. 1 Pavement Design Standards

	Design Parameters	Reference Code / Design Values
1.	Pavement Design	IRC: 37-2012- "Tentative Guidelines for Design of Flexible Pavements"
	Traffic Growth Rate	Adopted as per IRC: 37-2012
	Design Life	10 to 15 years
	Vehicle Damage Factor	Derived values based on Axle load survey. If these values are less than national average, then national average will be used.
	Lane Distribution Factor	As per IRC:37-2012
2.	Wearing Course Material	Bituminous Concrete

4.5.7 Information required for estimating design traffic

- Initial traffic in terms of number of Commercial Vehicles per day (CVPD).
- Traffic growth rate during the design life in percentage.
- Design life in number of years.
- Spectrum of axle loads.
- Vehicle Damage Factor (VDF).
- Distribution of commercial traffic over the carriageway.

4.5.8 Computation of Design Traffic

The design traffic in terms of the cumulative number of standard axles to be carried during the design life of the road should be computed using the following equation:

$$N = \frac{365 * \left[(1+r)^n - 1\right]}{r} * A * D * F$$

Where,

N = Cumulative number of repetitions in terms of million standard axles

Scanned by CamScanner

A = Initial traffic in the year of completion of construction in terms of the number of Commercial Vehicles per Day (CVPD).

D = Lane distribution factor (as explained in Para 4.5.1 (IRC: 37-2012)

F = Vehicle Damage Factor (VDF).

n = Design life in years.

r = Annual growth rate of commercial vehicles in decimal (e.g., for 5 per cent annual growth rate, r = 0.05).

Traffic Growth Rate

The present day traffic has to be projected for the end of design life at growth rates ('r') estimated by studying and analyzing the following data:

(i) The past trends of traffic growth; and

(ii) Demand elasticity of traffic with respect to macro-economic parameters (like GDP or SDP) and expected demand due to specific developments and land use changes likely to take place during design life.

If the data for the annual growth rate of commercial vehicles is not available or if it is less than 5 per cent, a growth rate of 5 per cent should be used.

The traffic in the year of completion is estimated using the following formula:

$$A=P(1+r)^n$$

Where,

P = Number of commercial vehicles as per last count.

n = Number of years between the last count and the year of completion of construction

4.5.9 Selection of Subgrade CBR for Pavement Design

The CBR values of the sub grade soil vary along a proposed alignment even on a homogeneous section. The pavement design is done based on Considering the CBR of Borrow area for Reconstruction and Widening Section and For Existing portion the CBR of Existing Sub grade / Sub base is considered.

4.5.10 Flexible Pavement Design – Re-construction

The CBR values of the subgrade soil vary along a proposed alignment even on a homogeneous section. The pavement design is done based on Considering the CBR of Borrow area for Reconstruction and Widening Section and For Existing portion the CBR of Existing Subgrade/Sub base is taken.

4.5.11 Widening Proposals & Typical Cross Sections

a) Widening options for the project road were arrived based on,

- Lane requirements based on traffic capacity analysis.

Scanned by CamScanner

Annexure A.4.1
FLEXIBLE PAVEMENT OVERLAY DESIGN

FLEXIBLE OVERLAY DESIGN:

DESIGN TRAFFIC:

The following equation is used to compute the design traffic in terms of the cumulative number of standard axles.

$$Ns = \frac{365 \times ((1+r)^{n} - 1)}{R} \times A \times D \times F$$

Where,

Ns = Cumulative number of standard axles to be catered for in the design, MSA.

A = Initial Traffic, in terms of commercial vehicles per day modified to account for lane distribution.

r = Annual growth rate of commercial vehicles

n = Design life in years

F = Vehicle Damage Factor

D= Lane distribution factor

The design traffic computed in terms of cumulative number of standard axles (msa).

Pavement compositions

Recommended for Surface course of 2 MSA		Recommended Base course of 2 MSA	
BC	**DBM**	**WMM**	**GSB**
30	50	Bad Reaches	

Scanned by CamScanner

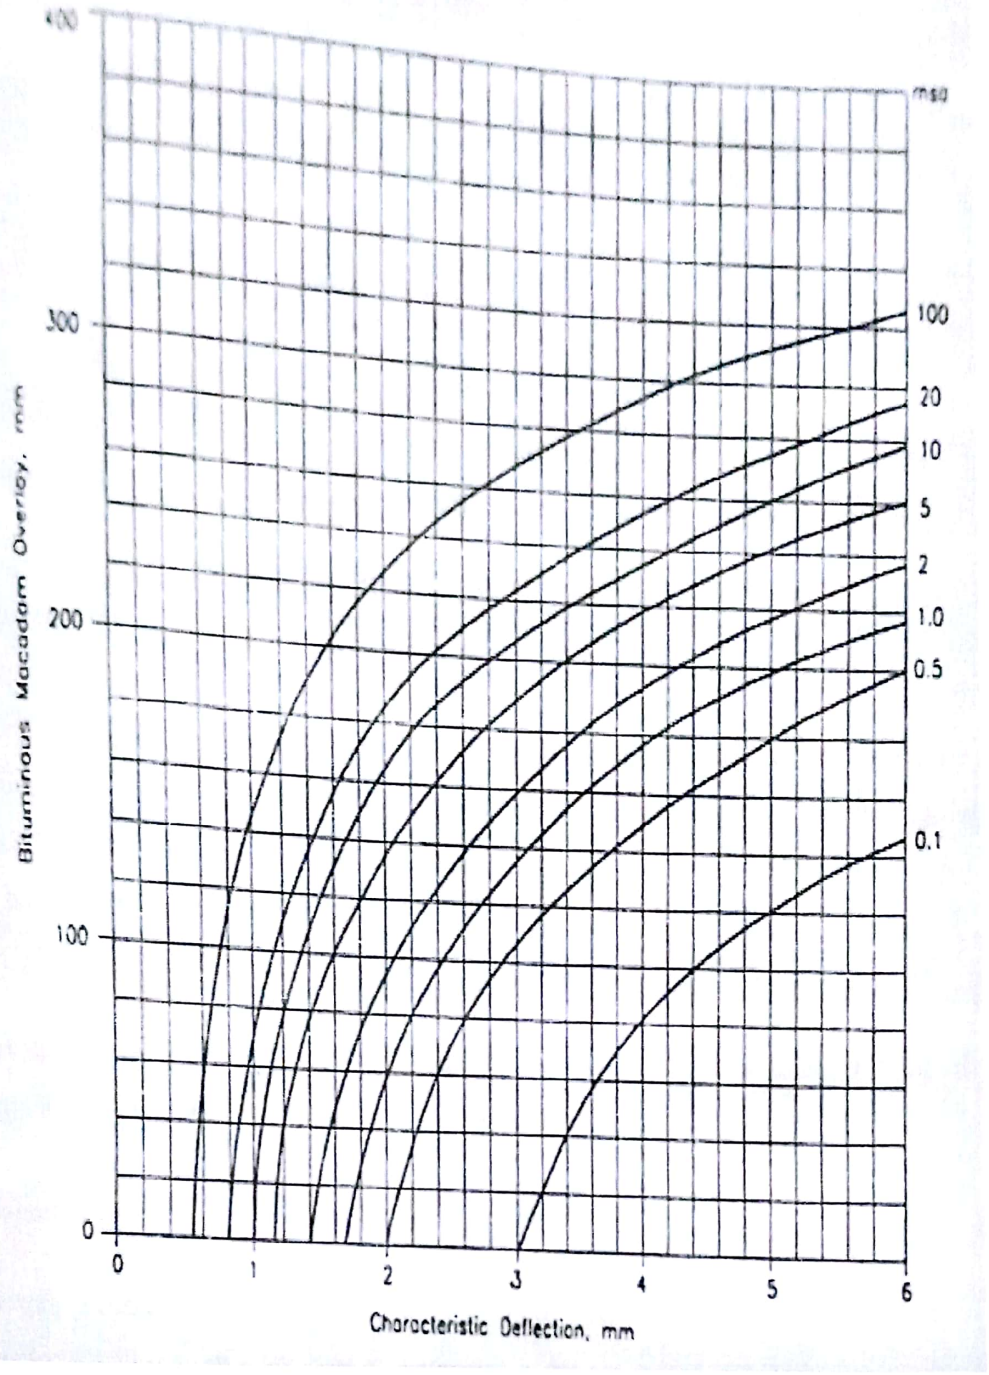

7.4. The thickness deduced from Fig. 9 is the overlay thickness in terms of bituminous macadam construction. In case other compositions are to be laid for strengthening, the equivalent overlay thickness to be provided may be determined using appropriate equivalency factors as suggested below :

1 cm of Bituminous macadam	= 1.5 cm of WBM/Wet Mix Macadam/BUSG
1 cm of Bituminous macadam	= 0.7 cm of DBM/AC/SDC

Scanned by CamScanner